


2MEGAPIXEL OWL VIEW EX/HD-SDI CAMERA

OEH-2BS84



DIMENSION

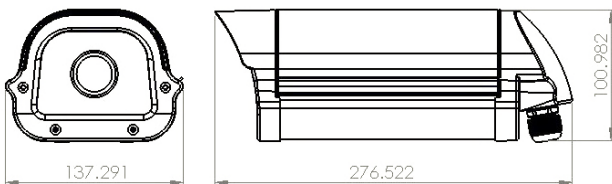

FEATURES

- 1/2.8", SONY progressive CMOS (STARVIS)
- 1080P (EX-SDI/HD-SDI) Video Output
- Min. Illumination 0.3 Lux
- Day & Night
- 2D & 3D Digital Noise Reduction
- WDR (More effectively than previous models)
- Motion Detection, Privacy Masking (16 Zone)
- Defog (Visibility enhancement on the low contrast scene)
- IP66 Weatherproof
- Option : OSD Controller

SPECIFICATIONS

OEH-2BS84	
Image Sensor	1/2.8", SONY progressive CMOS (STARVIS)
Total Pixels	1945(H) x 1109(V) = 2,157,005pixel
Effective Pixels	1937(H) x 1097(V) = 2,124,889pixel
Scanning System	Progressive
Resolution	1080P (25fps/30fps)
Video Output	EX-SDI HD-SDI
Minimum Illumination	More than 0.03 lux (DSS off)
Electronic Shutter Speed	AUTO / FLICKER / MANUAL (1/30(25)~1/30000)
S/N Ratio	More than 52db
Backlight Compensation	OFF / HLC / BLC / WDR
White Balance	AUTO / AUTOext / PRESET / MANUAL
Day & Night	AUTO / COLOR / B&W / EXT
Sense-up	OFF / x2. x4. x8. x16. x32
DNR	OFF / LOW / MIDDLE / HIGH
Defog	OFF / ON
Motion Detection	OFF / ON (16 Points)
Privacy Masking	OFF / ON (16 Points)
MIRROR FLIP	OFF / ON
D-WDR	OFF / ON
Language	KOR / ENG / CHN / JPN
LENS	STAR 4mm
Power Supply	DC 12V ±10%
Operating Temperature	-10°C ~ +50°C
Operating Humidity	Less than 80%
Dimension	137.2(W) x 100.9(H) x 276.5(D)mm
Weight	Approx. 1.3kg (W/ Sunsheld & Bracket)

* In accordance with customers' request and OSD controller's option, the specifications can be fixed or changed without notice.