




AHD 1080P / TDN / 3D DNR / D-WDR
CMOS COLOR IR BULLET CAMERA

SAU-2A60IRV

FEATURES

- 1/2.8 inch, 2.4 Megapixel Sony Exmor CMOS
- 1080P AHD / 1280H(1000TVL) CVBS Video Output
- Min. Illumination 0.05 Lux / F1.0 , B/W:0.005 Lux / F1.0(With IR)
- True Day & Night
- NTSC/PAL Selectable
- Defog(Visibility enhancement on the low contrast scene)
- 2D & 3D Digital Noise Reduction
- Motion Detection, Privacy Masking (4 Zone)
- 60pcs IR LED
- Varifocal Lens 2.8 -12.0mm
- Option : External Controller

DIMENSION

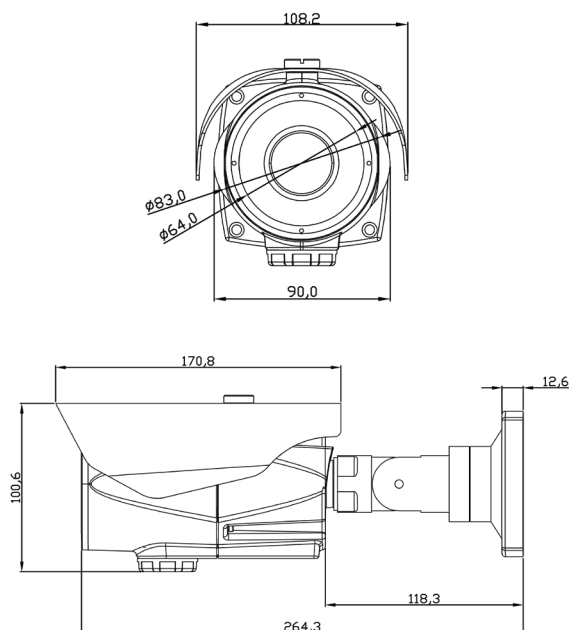

SPECIFICATIONS

SAU-2A60IRV	
Image Device	1/2.8 inch, 2.4 Megapixel Sony Exmor CMOS
Total Pixels	2000(H) X 1241(V)
Effective Pixel	1984(H) X 1225(V)
Scanning System	Progressive
Resolution	CVBS(1280H)_1000TVL, AHD(1080P)_1100TVL
Minimum Illumination (F1.0, 30IRE)	Color : 0.5 Lux/BW : 0.05 Lux Color sens-up : 0.05Lux/BW sens-up : 0.005Lux
Electronic Shutter Speed	AUTO / FLK NTSC : 1/30 ~ 1/50,000sec / PAL : 1/25 ~ 1/50,000sec
S/N Ratio	More than 52db
Backlight Compensation	BLC / HSBLIC
White Balance	ATW / AWC-SET / INDOOR / OUTDOOR / MANUAL / AWB
2DNR	CVBS
3DNR	AHD
Day & Night	AUTO / COLOR / BW / EXT
Sense-up	AUTO(x6) / x2 . x4 . x6 . x8 . x10 . x15 . x20 . x25 x 30
D-WDR	OFF / ON
Motion Detection	OFF / ON
Privacy Masking	4 ZONE
Defog	ON / OFF
D - EFFECT	OFF / MIRROR / V-FLIP / ROTATE & FREEZE
Communication	Coaxial Comm..
LANGUAGE	ENG / CHN1 / CHN2 / GER / FRA / ITA / SPA POL / RUS / POR / NED / TUR
Lens	Varifocal Lens 2.8 -12.0mm
Power Supply	DC 12V (±30%)
Power Consumption	LED Off : Max. 1.2W / LED On : Max. 5.5W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	Less than 90%
Dimension	108(Ø) x 279.80(H)mm
Weight	Approx. 1.2Kg (W/ Sunshield & Bracket)

* In accordance with customers' request and OSD controller's option, the specifications can be fixed or changed without notice.