


4MEGAPIXEL ANALOG HD ALL-IN-ONE CAMERA

# SAU-4AM35IR



## DIMENSION

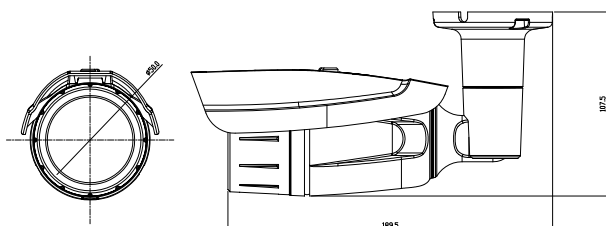

## FEATURES

- 1/3", 4 MegaPixel CMOS
- ALL IN ONE (AHD/TVI/CVBS) Video Output
- True Day & Night
- NTSC/PAL Selectable
- IR LED 35pcs
- Fixed Lens 3.6mm
- Option : OSD Controller

## SPECIFICATIONS

| SAU-4AM35IR           |                                                            |
|-----------------------|------------------------------------------------------------|
| Signal Format         | NTSC   PAL                                                 |
| Image Sensor          | 1/3", 4 MegaPixel CMOS                                     |
| Effective Pixels      | 2688(H) × 1520(V)                                          |
| Video Output          | AHD/TVI/CVBS                                               |
| Mini. Illumination    | 0.01LUX                                                    |
| S/N ratio             | More Than 50dB                                             |
| Electronic Shutter    | AUTO (PAL : 1/50-1/50, 000Sec<br>NTSC : 1/60-1/50, 000Sec) |
| Day & Night           | External(default) / Auto / Color / BW(OSD Switch)          |
| White balance         | AUTO                                                       |
| BLC                   | AUTO                                                       |
| HLC/2D                | SUPPORT                                                    |
| Language              | English / Chinese / Japanese                               |
| LENS                  | Fixed Lens 3.6mm                                           |
| Power Supply          | DC 12V ±10%                                                |
| Operating Temperature | -10°C ~ +50°C                                              |
| Operating Humidity    | Less than 90%                                              |
| Dimension             | 73.7(W) x 107.5(H) x 189.5(D)mm                            |
| Weight                | Approx. 450g (W/ Sunshield & Bracket)                      |

\* In accordance with customers' request and OSD controller's option, the specifications can be fixed or changed without notice.