


HD ANALOG 1080P / 3D DNR / D-WDR
CMOS COLOR IR VANDAL DOME CAMERA

SAV-2A32IRV

FEATURES

- 1/2.8 inch, 2.4 Megapixel Sony Exmor CMOS
- 1080P AHD, TVI, CVI, CVBS Solution
- Min. Illumination 0.05 Lux / F1.0 , B/W:0.005 Lux / F1.0(With IR)
- True Day & Night
- NTSC/PAL Selectable
- Defog(Visibility enhancement on the low contrast scene)
- 2D & 3D Digital Noise Reduction
- Motion Detection, Privacy Masking (4 Zone)
- 3-Axis Gimbal Bracket
- 32pcs IR LED
- Varifocal Lens 2.8~12.0mm
- Option : OSD Controller

DIMENSION

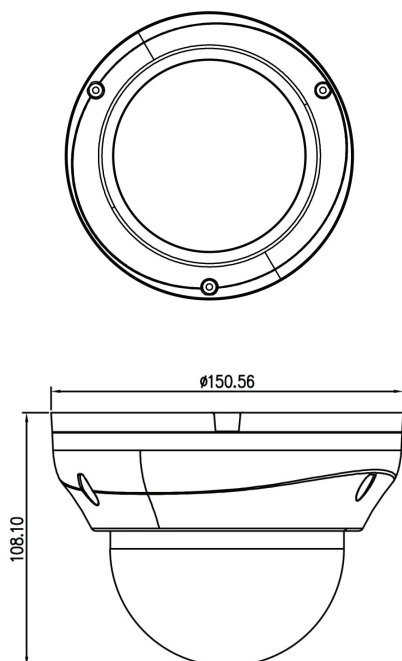

SPECIFICATIONS

SAV-2A32IRV	
Image Device	1/2.8 inch, 2.4 Megapixel Sony Exmor CMOS
Total Pixels	2000(H) X 1241(V)
Effective Pixel	1984(H) X 1225(V)
Scanning System	Progressive
Resolution	CVBS(1280H)_1000TVL, HD ANALOG(1080P)
Minimum Illumination (F1.0, 30IRE)	Color : 0.5 Lux/BW : 0.05 Lux Color sens-up : 0.05Lux/BW sens-up : 0.005Lux
Electronic Shutter Speed	AUTO / FLK NTSC : 1/30 ~ 1/50,000sec / PAL : 1/25 ~ 1/50,000sec
S/N Ratio	More than 52db
Backlight Compensation	BLC / HSBLIC
White Balance	ATW / AWC-SET / INDOOR / OUTDOOR / MANUAL / AWB
2DNR	CVBS
3DNR	AHD
Day & Night	AUTO / COLOR / BW / EXT
Sense-up	AUTO(x6) / x2 . x4 . x6 . x8 . x10 . x15 . x20 . x25 x 30
D-WDR	OFF / ON
Motion Detection	OFF / ON
Privacy Masking	4 ZONE
Defog	ON / OFF
D - EFFECT	OFF / MIRROR / V-FLIP / ROTATE & FREEZE
Communication	Coaxial Comm..
LANGUAGE	ENG / CHN1 / CHN2 / GER / FRA / ITA / SPA POL / RUS / POR / NED / TUR
Lens	Varifocal Lens 2.8~12.0mm
Power Supply	DC 12V (±30%)
Power Consumption	LED Off : Max. 1.8W / LED On : Max. 2.8W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	Less than 90%
Dimension	150.56(Ø) x108.10(H)mm
Weight	Approx. 820g

* In accordance with customers' request and OSD controller's option, the specifications can be fixed or changed without notice.